


Specification Sheet

Model: E7500	Description: Two-Wire 4-20 mA Transmitter	Document #: 24527-15	Rev: 1.2	Date: 02-05
------------------------	---	--------------------------------	--------------------	-----------------------

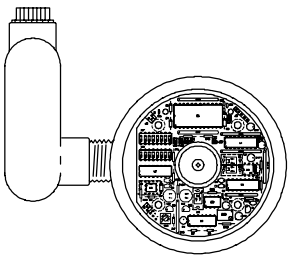

Features:

- ◆ Industry standard 2-wire 4-20 mA output, Anti-Reverse
- ◆ Output is linear with flowrate
- ◆ Compatible with all McCrometer propeller meters with a mechanical register
- ◆ Installation can be accomplished without meter removal from pipe
- ◆ For meter sizes from 24" and above
- ◆ Signal can travel up to 5000 feet
- ◆ Additional pulse output options

E 7 5 0 0 - 0 1 x

Pulse Output

- 0 - None
- 1 - Dry Contact
- 2 - Open Collector


E7500 Model:	4-20 mA Output	Dry Contact	Open Collector	Anti-Reverse
E7500-010	•			•
E7500-011	•	•		•
E7500-012	•		•	•

Electrical Characteristics:

4-20 mA Output:


Operating Temperature:	+25 to +130 degrees F
Supply Voltage:	16 - 40 VDC
Temperature Coefficient:	±1.0%
Linearity:	0.1%
Accuracy:	0.5% over the entire range
Maximum Resistive Load:	Supply Voltage Dependent*
Reverse Voltage Protection:	-300V Maximum

Typical Wiring Diagrams:

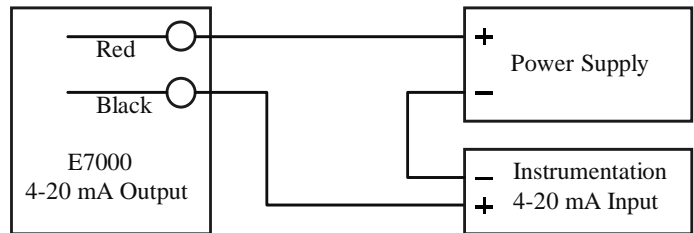


Dry Contact Output:**

Type:	Relay Contact, Norm. Open
Rated Load (AC):	0.5 A at 125 VAC
Rated Load (DC):	1 A at 30 VDC
Max. Operating Current:	1 A
Max. Switching Power:	30 W, 62.5 VA
Contact Closure Duration:	20 milliseconds
Max. Clicks per Minute:	10

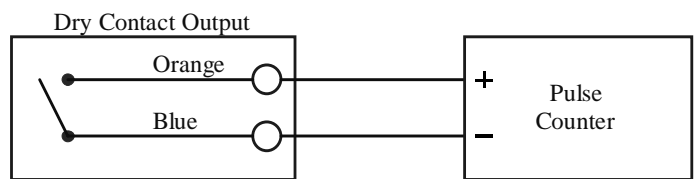

Open Collector Output:**

Type:	NPN Darlington, Isolated
Isolation Voltage:	5000 VAC
Collector to Emitter Voltage:	40 VDC Maximum
Collector Current:	200 mA Maximum
Pulse Output Duration:	20 milliseconds
Max. Pulses per Minute:	350

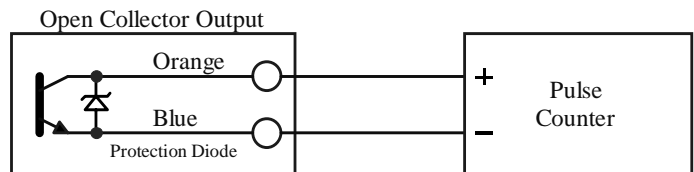

* - Use formula (Supply Voltage - 16) ÷ 0.02 = Maximum Load(Ω)
 ** - Totalizer output operates only when power is applied to the 4-20 mA loop.

McCrometer reserves the right to change the Specification without notice.

